



KUNKLE MODEL 30 SAFETY VALVE

SAFETY AND RELIEF PRODUCTS

A top venting brass safety valve that meets ASME Section VIII, UV, for air/gas service.



FEATURES

- Top guided disc provides optimum performance.
- Tested and inspected for pressure setting and leakage.
- National Board certified.

GENERAL APPLICATION

Model 30 is suitable for use on small to medium size multi-stage air compressors, intercoolers, aftercoolers, instrument/control air lines and systems and for air tanks/receivers and pressurized equipment.

CALIFORNIA PROPOSITION 65 WARNING

This product can expose you to chemicals including nickel, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

TECHNICAL DATA

Connections: Threaded NPT or BSPT
Temperature range: -20 to 300°F
(-29 to 150°C)
Pressure range: 60 to 4000 psig
(4 to 276 barg)
Code: ASME VIII



KUNKLE MODEL 30 SAFETY VALVE


SAFETY AND RELIEF PRODUCTS

ASME SECTION VIII AIR CAPACITY 10% ACCUMULATION; 60°F (16°C)

Set pressure		Capacity	
psig	barg	SCFM	Nm³/h
60	4	15	23
100	6.9	23	37
250	17.2	54	87
300	20.7	64	103
400	27.6	85	136
500	34.5	105	169
750	51.7	156	251
1000	69.0	207	334
1250	86.2	258	416
1500	103.4	310	499
1750	121.0	361	580
2000	138.0	412	663
2250	155.0	463	745
2500	172.0	514	826
3000	207.0	617	993
3500	241.0	719	1155
4000	276.0	821	1320


PARTS AND MATERIALS

No.	Part name	Material
1	Body	Brass
2	Disc holder	Brass
3	Spring	SS
4	Compression screw	Brass
5	Lift ring	SS
6	Ball	Torlon®
7	Nameplate	Aluminum Commercial
8	Drive screw	SST Commercial

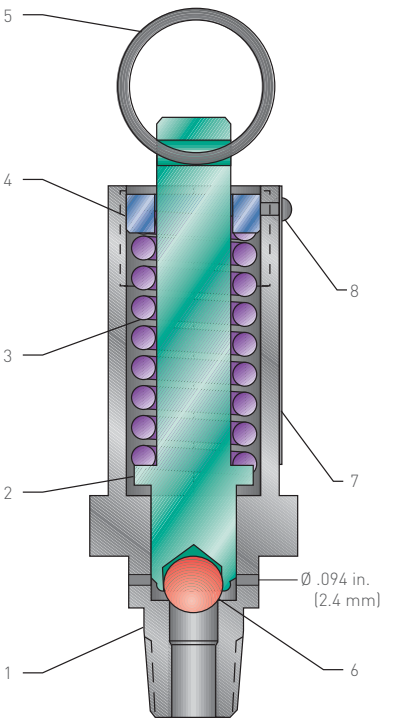

SELECTION GUIDE

Example:	0030	-	A	01	-	K	M	0250
Model								
0030								
Inlet size								
A	¼ in. (6.35 mm)							
Variation (01 to 99)								
01	Catalog standard NPT connection							
60	BSPT connection							
Design revision								
Indicates non-interchangeable revision								
Dash (-) if original design								
Spring material								
M	SST							
Set pressure								
0060	60 psig (4 barg)							
4000	4000 psig (276 barg)							

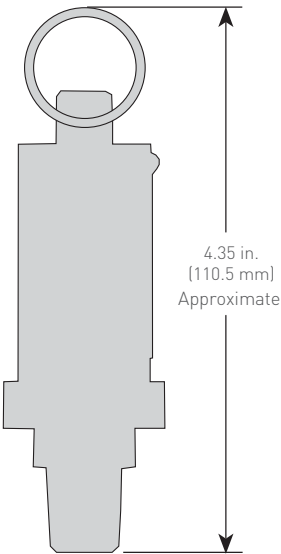

Torlon® is a mark owned by Solvay Specialty Polymers USA, L.L.C.

VCTDS-00377-EN © 2017, 2025 Emerson Electric Co. All rights reserved 01/25. Kunkle™ is a mark owned by a subsidiary of Emerson Electric Co. The Emerson logo is a trademark and service mark of Emerson Electric Co. All other marks are property of their respective owners.

The contents of this publication are presented for informational purposes only and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available upon request. We reserve the right to modify or improve the designs or specifications of such products at any time without notice.

Emerson Electric Co. does not assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use and maintenance of any Emerson Electric Co. product remains solely with the purchaser

Emerson.com
